

PASS-THROUGH DISHWASHERS

EW800

Pass-through Dishwasher



1080 Plates/hour

2160 Glasses/hour

Wash Cycles:

60 sec

90 sec

120 sec

Big power with a small footprint, the Eurowash EW800 is a dish washing beast, perfect for the busiest kitchen. The massive 465mm hood opening devours huge amounts of dishes and glasses, so you power through the busiest of sessions with ease. The exclusive patented hood design is engineered to greatly reduce lifting effort without sacrificing quality.

3 high speed wash cycles give you flexibility to challenge any load of dirty kitchenware. The super efficient double-flow wash pump with big 21 litre tank, delivers a whopping 500 litres per minute through long life stainless steel arms. Yet the EW800 saves on water use, consuming as little as 2.3 litres per cycle.

The soft-touch electronic panel gives easy access to all controls, plus the in-built self-diagnostic technology ensures trouble-free operation.


To help protect your reputation and compliance with food-safety, the EW800 features a powerful self-cleaning cycle of the wash tank and chamber.

The EW800 is designed for the busiest commercial kitchen and comes with standard fittings and features, others only offer as options. These include a self-cleaning cycle, detergent and rinse aid dispensers, drain and fill hoses and pumps. In the package you also score a plate rack, cup rack and cutlery container.

A		Ø50 mm M
B		G 3/4" M
C		



Benches & accessories not included

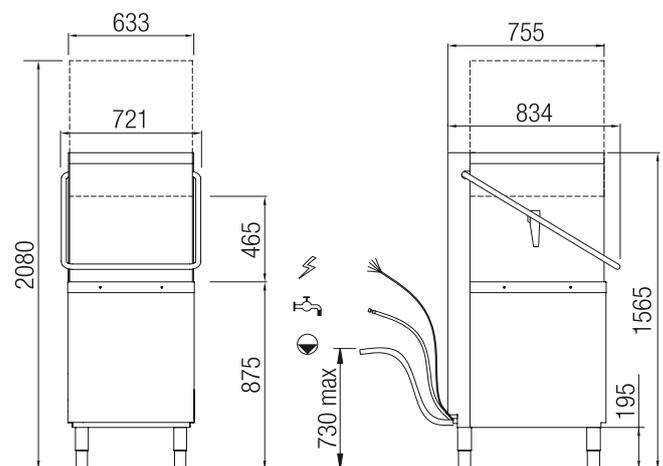

Compelling benefits of the EW800 Dishwasher:

- Easy to remove wash/rinse arms and scrap trays for cleaning.
- Patented anti-clogging wash arm design, in stainless steel for long life.
- Supplied complete with built-in drain, rinse, detergent and rinse aid pumps, a cup rack, plate rack and cutlery basket.

Waste

EW800 comes complete with drain pump, drain hose must be lifted 750mm above machine base.

Detergent

Detergent pump and rinse aid pump are fitted, refer installation instructions.

EUROWASH EW800

Rack Dimensions (mm)	500 x 500
Door Opening (mm)	465
Total Load (V/Hz/pH/Kw/AMP)	400/50/3N 6.7Kw
Water Supply Temperature (C)	50 - 65
Water Supply Pressure (bar)	0.5 - 4
Water Consumption (lt/cycle)	2.3
Tank Capacity (lt)	22
Rinse Pump	STANDARD
Drain Pump	STANDARD
Detergent Dispenser	STANDARD
Rinse-Aid Dispenser	STANDARD
Control Panel	Electronic Soft-Pad
Self-Diagnostic System	YES
Self-cleaning cycle	STANDARD

This machine must be installed in accordance with AS/NZS3500.1